

Ballasts for High Pressure Sodium Vapour 50 W Lamps with shape (66*53) mm

Protection Class: I

Maximum winding temperature (t_w): 130 °C


According to:

IEC61347-1, IEC61347-2-9, IEC60923

ISIRI7644-1, ISIRI7644-2-9 , ISIRI5190

The winding of BS/BMH507-AL ballast is made of aluminium enamelled wire.

Use only with superimposed ignitor.

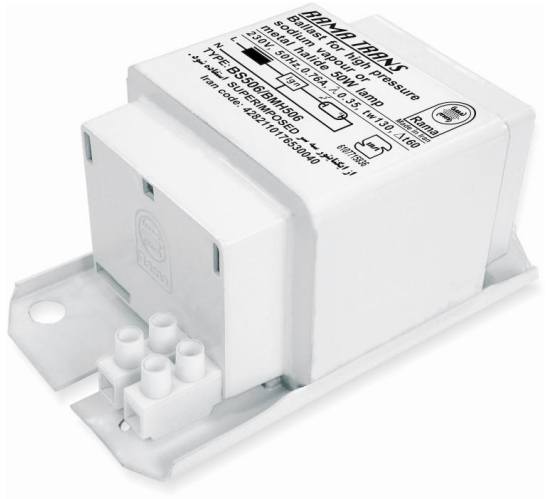

Ballast									Lamp		Capacitor
Type	Voltage (V)/(Hz)	Δt (°C)	Power Factor λ	Ballast Efficiency η	Dimensions			Weight (Kg)	Output (W)	Current (A)	C_p (μf)
					a (mm)	b (mm)	c (mm)				
BS/BMH502	220/50	60	0.37	82	120	96	38	1.05	50	0.76	9
BS/BMH504	230/50	55	0.35	82	120	96	38	1.11	50	0.76	9
BS/BMH506	230/50	60	0.35	82	120	96	38	1.10	50	0.76	9
BS/BMH507-AL	230/50	60	0.35	79	120	96	50	1.20	50	0.76	9

